



You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?







- A specially engineered composite shingle that mimics the look and feel of natural slate
- Lighter and more durable than natural slate
- Exceptional UV fade-resistant surface technology for superior color stability
- 50-year limited, transferable warranty*
- 7-year SureStart[™] protection
- 5-year 90 mph wind-resistance warranty
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

• UL Class A (with approved underlayment)

Wind Resistance:

• Passed ASTM D3161 wind resistance at 110 mph

Impact Resistance:


• UL2218 Class 4














COLOR AVAILABILITY

Black Pearl











- Two full-size, fiber glass base shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

LUXURY SHINGLES

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



BELMONT

- Two full-size, fiber glass base shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- 275 lbs. per square
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (Select colors**)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

UL2218 Class 4 (Select colors only)





















CARRIAGE HOUSE®

- Two full-size, fiber glass base shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- ullet UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.



PRESIDENTIAL SHAKE TL®

- Three-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537












• Two-pie



Chestnut







PRESIDENTIAL SHAKE®

- Two-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algaeresistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (Select colors**)



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

 Presidential Shake IR is UL2218, Class 4 Impact Resistance (Select colors** only)

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



LANDMARK PRO®

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

Also available in Landmark® Premium:

A heavier weight product (300 lb. per square) available in eight maximum definition colors (Max Def Burnt Sienna, Max Def Cobblestone Gray, Max Def Colonial Slate, Max Def Driftwood, Max Def Georgetown Gray,

Max Def Moire Black, Max Def Pewterwood and Max Def Weathered Wood)

with the same warranties and performance ratings as Landmark Pro.

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537




























Cottage Red

Pewterwood

Weathered Wood

LANDMARK®

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 235 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance: • UL certified to meet

- ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

^{*} See warranty for specific details and limitations.



LANDMARK SOLARIS®

Solar Reflective Shingles


- Two-piece laminated fiber glass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty residential*
- 50-year limited transferable warranty group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (Select color**)
- * See warranty for specific details and limitations.

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

| | | | CRRC | · * | ç. | | | | |
|----------------------------|------------------------|--------------|--------------|---------|---------------|-----------------|------------------|----------------------------|------------------------------|
| Product | Color | So Reflec | lar tance | | rmal tance | Solar Re Inc | eflective lex | ets lifornia le 24?* | Energy Star Certified? |
| | | Initial | Aged | Initial | Aged | Initial | Aged | ₹ã₹ | |
| Landmark Solaris" Gold | Max Def Resawn Shake | 0.26 | 0.25 | 0.88 | 0.90 | 26 | 25 | YES | YES |
| Landmark Solaris® Gold | Max Def Weathered Wood | 0.25 | 0.24 | 0.90 | 0.89 | 25 | 24 | YES | YES |
| Landmark Solaris" Platinum | Coastal Tan | 0.40 | 0.36 | 0.91 | 0.90 | 45 | 40 | YES | YES |
| Landmark Solaris® Platinum | Santa Fe | 0.40 | 0.35 | 0.90 | 0.91 | 45 | 39 | YES | YES |
| Landmark Solaris" Platinum | Sierra Buff | 0.41 | 0.37 | 0.92 | 0.90 | 47 | 41 | YES | YES |

^{*} New products without aged solar reflectance values comply using the equation provided in Section 110.8.i.2 of California Title 24, Part 6





LANDMARK SOLARIS **PLATINUM**









Max Def Weathered Wood

New England Slate

COLOR AVAILABILITY

Black Granite**

Fieldstone







HIGHLAND SLATE®

- Single layer fiber glass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version Impact Resistant version available (Select colors**)



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

DESIGNER SHINGLES

Fire Resistance:

- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Impact Resistance:

• Highland Slate IR is UL2218, Class 4 (Select colors only)

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

13



INDEPENDENCE®

- One full-size, fiber glass base shingle with randomly applied tabs
- Deep shadow lines and random tabs create a distinct dimensional look
- 250 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161

Tear Resistance:


• UL certified to meet ASTM D3462 • CSA standard A123.5

Quality Standards:


• ICC-ES-ESR-1389 & ESR-3537












PATRIOT





COLOR AVAILABILITY

Colonial Slate







- Architectural style shingles
- Single layer fiber glass-based construction
- Intricate color blend drops combined with intermittent shadow lines
- 215 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 8-year SureStart[™] protection
- 10-year 110 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

TRADITIONAL SHINGLES

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3161 Class F
- UL certified to meet ASTM D7158 Class H

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

TRADITIONAL SHINGLES



In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CERTAINTEED XT™25

- Fiber glass composition
- Designed for long-lasting performance and durability
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® warranty
- 5-year SureStart[™] protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

• UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Moire Black Black Black Pepper Nickel Gray Chestnut Brown Oakwood **Gray Frost** Slate Gray

Star White Weathered Wood

Timber Blend

Central and SE PA., and Southern NJ areas only

Black Cedar Brown Dove Gray Heather Blend Evergreen Blend **Gray Frost** Oakwood **Moire Black** Nickel Gray Silver Lining



In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

Tile Red Blend

CT[™] 20

Slate Gray

- Fiber glass composition
- 195 lbs. per square
- 20-year limited transferable warranty*
- 3-year SureStart[™] protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Cedar Brown Dove Gray

Moire Black Weathered Wood

CERTAINTEED XT[™]25

TRADITIONAL SHINGLES

- Fiber glass composition
- 205 lbs. per square
- 25-year limited transferable warranty*
- 10-year StreakFighter® warranty
- 5-year SureStart™ protection
- 5-year 60 mph wind-resistance warranty
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

Black Gray Frost Cedar Brown Heather Blend Cinnamon Frost Mint Frost Dove Gray Moire Black Evergreen Blend

Oakwood Silver Lining Slate Gray Star White

Timber Blend Weathered Wood

17

16 Nickel Gray Tile Red Blend

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- · Algae resistant



Solaris[®] Hip and Ridge

- Used for hip and ridge capping
- · Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors



Symphony®

• Used for hip and ridge capping



Integrity Roof System™

Integrity is built from the bottom up. Layer-on-layer, only CertainTeed provides the peace of mind that comes with the best components performing together for peak efficiency.



Waterproof Underlayment

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams

Water-resistant Underlayment

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

5. Hip & Ridge Caps

Perfect finish for hip and ridge lines, complementing all CertainTeed shingles

Roof Ventilation

Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents



| LLLCII | | ' L | | I | | I | I | l | | ی ا | l s ti | (<i>a</i>)(<i>a</i>) | _ | | l | |
|--|------------|--|-----------------------------|--------------------------------------|------------------------------------|--|-------------------------------------|-------------------------------|--|------------------------------------|--|---|----------------------|---|--------------------------------------|-----------------------|
| LUXURY SHII | NGLES | Shingle Construction and Description | Weight (lbs. per square) | UL Class A Fire Resistance Rating | UL Certified to Meet ASTM D3462 | UL Certified to Meet ASTM D3018 Type 1 | UL 2218 Impact Resistance Rating | ASTM D3161 Wind Resistance | Miami-Dade Product Control Acceptance | Conforms To CSA Standard A123.5 | Limited Transferable Warranty Against Manufacturing Defects On Residential Applications '50-Year on Group-owned or Commercial Applications | StreakFighter algae-resistance Warranty (where available) | SureStart Protection | Wind-Resistance Warranty Upgraded wind warranty available. See warranty for details and limitations | Shingle Size | Bundles Per Square |
| Grand Manor | | Two full-size, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied | 425 | v | V | V | | Class F, 110 mph | ~ | V | Lifetime* | 15-year | | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| Belmont Impact Resistant Version Available (Select colors) | | Two full-size, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate | 275 | ~ | ~ | V | Class 4 | Class F, 110 mph | | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 4 |
| Carriage House | لتلتا | Two full-size, fiber glass base shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied | 350 | ~ | ~ | ~ | | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 5 |
| Presidential Shake TL | | Three-piece laminated fiber glass construction; Distinctive sculpted, rustic look | 475 | ~ | ~ | ~ | | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 6 |
| Presidential Shake Impact Resistant Version Available | | Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look | 355 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| Presidential Solaris | | Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look | 355 | ~ | ~ | · | | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 14 1/4" x 40" 4" Exposure | 5 |
| COMPOSITE | SLATE | | | | | | | | | | | | | | | |
| Symphony | | A specially engineered composite roofing shingle that mimics the look and feel of natural slate; Lighter and more durable than natural slate; exceptional UV fade-resistant surface technology | varies | / *** | | | Class 4 | Passed at 110 mph | | | 50-year | | 7-year | 5-year 90 mph ** | 18" x 6", 9" & 12" | varies |
| DESIGNER S | HINGLES | | | | | | | | | | | | | | | |
| Landmark Pro | | Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate | 250 | ~ | ~ | ~ | | Class F, 110 mph | | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| Landmark Premium | | Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate | 300 | ~ | ~ | ~ | | Class F, 110 mph | | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 4 |
| Landmark | | Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate | 235 | ~ | ~ | ~ | | Class F, 110 mph | | ~ | Lifetime | 10-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| Landmark Solaris Impact Resistant Version Available | | Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate | 250 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 13 1/4" x 38 3/4" 5 5/8" Exposure | 3 |
| Highland Slate Impact Resistant Version Available (Select colors) | | Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate | 240 | ~ | ~ | ~ | Class 4 | Class F, 110 mph | ~ | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 18" x 36" 8" Exposure | 3 |
| Independence | | One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look | 250 | ~ | ~ | ~ | | ~ | | ~ | Lifetime* | 15-year | 10-year | 15-year 110 mph ** | 12" x 36" 5" Exposure | 4 |
| Patriot | | Architectural style shingle; Single layer fiber glass base construction; Intricate color blend drops combined with intermittent shadow lines | 215 | ~ | ~ | ~ | | Class F, 110 mph | | ~ | 30-year | 10-year | 8-year | 10-year 110 mph | 13 1/4" x 39 3/8" 5 5/8" Exposure | 3 |
| TRADITIONA | L SHINGLES | | | | | | | | | | | | , | | | |
| XT 25 | | Fiber glass composition; Designed for long-lasting performance and durability | 205 | • | ~ | ~ | | Class F, 110 mph | • | | 25-year | 10-year | 5-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |
| CT 20 | | Fiber glass composition; Designed for long-lasting performance and durability | 195 | ~ | ~ | ~ | | Class F, 110 mph | ~ | | 20-year | | 3-year | 5-year 60 mph | 12" x 36" 5" Exposure | 3 |

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- Saves significant installation time

Symphony® Hip and Ridge

 Full line of hip and ridge accessories to complement and enhance the slate-inspired look of Symphony.

Shangle® Ridge Accessory

 Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

 Hip and ridge for Presidential TL, Presidential, Landmark Series and Independence; 30 lineal ft. per bundle; 24 shingles per bundle

Solaris[®] Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal ft. per bundle;
 24 shingles per bundle

Cedar Crest®

 Hip and ridge for Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle

Ventilation

- CertainTeed Ridge Vent 12" filtered
- CertainTeed Rolled Ridge Vent filtered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent

^{**} Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required. *** With approved underlayment

StreakFighter® algae-resistance protection

StreakFighter is a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. It helps safeguard a roof's beauty, especially in humid areas.

SureStart™ protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period,
CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

Roofers' Select®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety

 Roofers'
- Doesn't tear away from fasteners when walked on or in strong wind
- Meets underlayment requirements for the CertainTeed Integrity Roof System™

DiamondDeck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.



WinterGuard®





When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.


MetaLayment® Self-Adhering Metal Underlayment

MetaLayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.



With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in eight colors that complement some of the most popular CertainTeed shingles.

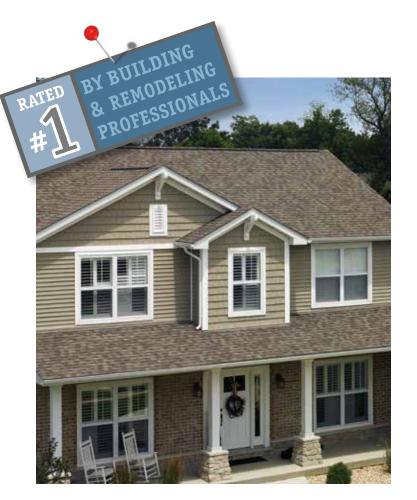

What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

23

RESIDENTIAL ROOFING





CertainTeed Corporation

20 Moores Road Malvern, PA 19355 www.certainteed.com Products available in areas shown



ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE GYPSUM • CEILINGS • INSULATION

Professional: 800-233-8990 Consumer: 800-782-8777